

Exposed FDC Inlet (2-Way and 3-Way) - Straight

An exposed type fire department inlet connection is designed to provide supplemental water to a building's fire protection system. Typically, these units are wall mounted.

250 GPM per inlet; 175 PSI max operating pressure

U/L Listed (2-way only). Contact us for current approvals.






Model #	Size & Configuration	Clappers	A	B	C
FDC221-12	4" Groove x 2½" x 2½"	1	7 1/8"	8 1/4"	4 1/2"
FDC221-10	4" F NPT x 2½" x 2½"	1	5 5/8"	8 1/4"	5 1/8"
FDC221-01	4" F NPT x 2½" x 2½"	2	7 1/4"	11 1/2"	5 1/8"
FDC221-04	6" F NPT x 2½" x 2½"	2	8 1/2"	11 3/4"	7 1/4"
FDC231-05	4" F NPT x 2½" x 2½" x 2½"	3	10 1/2"	13 3/4"	5 1/8"
FDC231-01	6" F NPT x 2½" x 2½" x 2½"	3	10 1/2"	13 3/4"	7 1/4"

Specify Finish:

- RB** Rough Brass
- PB** Polished Brass
- PC** Polished Chrome

- FDC221-12 Available in rough brass only

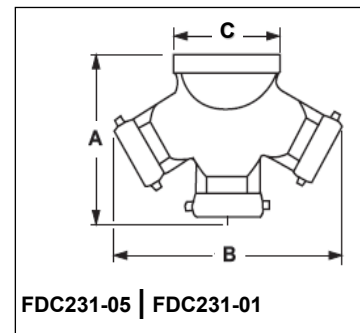

Optional Accessories



Round Wall Plates

Available in a variety of sizes, finishes, and lettering options



Plugs & Chains

Available in a variety of finishes