

Exposed FDC Inlet (2-Way) - Straight

An exposed type fire department inlet connection is designed to provide supplemental water to a building's fire protection system. Typically, these units are wall mounted. 3" NYFD threaded swivel inlet connections.

250 GPM per inlet; 175 PSI max operating pressure


U/L Listed, FDNY Approved. Contact us for current approvals.



Model #	Size & Configuration	Clappers	A	B	C
FDC221-14	4" F NPT x 3" x 3"	2	7 9/16"	11 5/16"	4 15/16"
FDC221-15	6" F NPT x 3" x 3"	2	8 7/16"	11 9/16"	7 1/16"

Specify Finish:

- RB** Rough Brass
- PB** Polished Brass
- PC** Polished Chrome

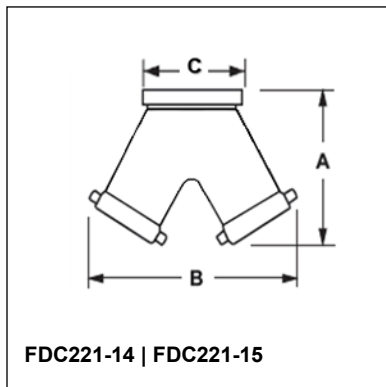

Optional Accessories



Round Wall Plates

Available in a variety of sizes, finishes, and lettering options



Plugs & Chains

Painted red, yellow, or green to correspond with system type.