

Angle Hose Valve


Used as a Fire Department Outlet Connection,
or with a Fire Hose Rack Assembly.

Rated for 300 PSI max operating pressure.

U/L listed. Contact us for current approvals.

Part Number	Size	Configuration	Finish
V25FMRB	2 ½"	Female NPT x Male NST	Rough Brass
V25FMPB	2 ½"	Female NPT x Male NST	Polished Brass
V25FMPC	2 ½"	Female NPT x Male NST	Polished Chrome
V25GMRB	2 ½"	Groove x Male NST	Rough Brass
V25GMPC	2 ½"	Groove x Male NST	Polished Chrome
V25FFRB	2 ½"	Female NPT x Female NPT	Rough Brass
V15FMRB1	1 ½"	Female NPT x Male NST	Rough Brass
V15FMRB3	1 ½"	Female NPT x Male NPSH	Rough Brass
V15FFRB	1 ½"	Female NPT x Female NPT	Rough Brass

	1 ½"	2 ½"
A	3.99"	5.125"
B	4.50"	5.90"
C	2.44"	3.34"
D (threaded)	2.00"	2.75"
D (grooved)	NA	3.75"
E	5.70"	7.67"

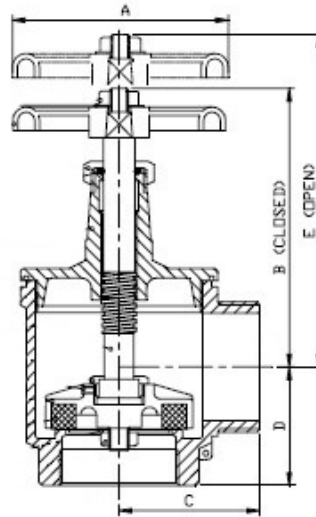

Optional Accessories



Reducers

Available in a variety of finishes




Caps & Chains

Available in a variety of finishes

Continued on page(s) below:

1½" Hose Valve Friction Loss

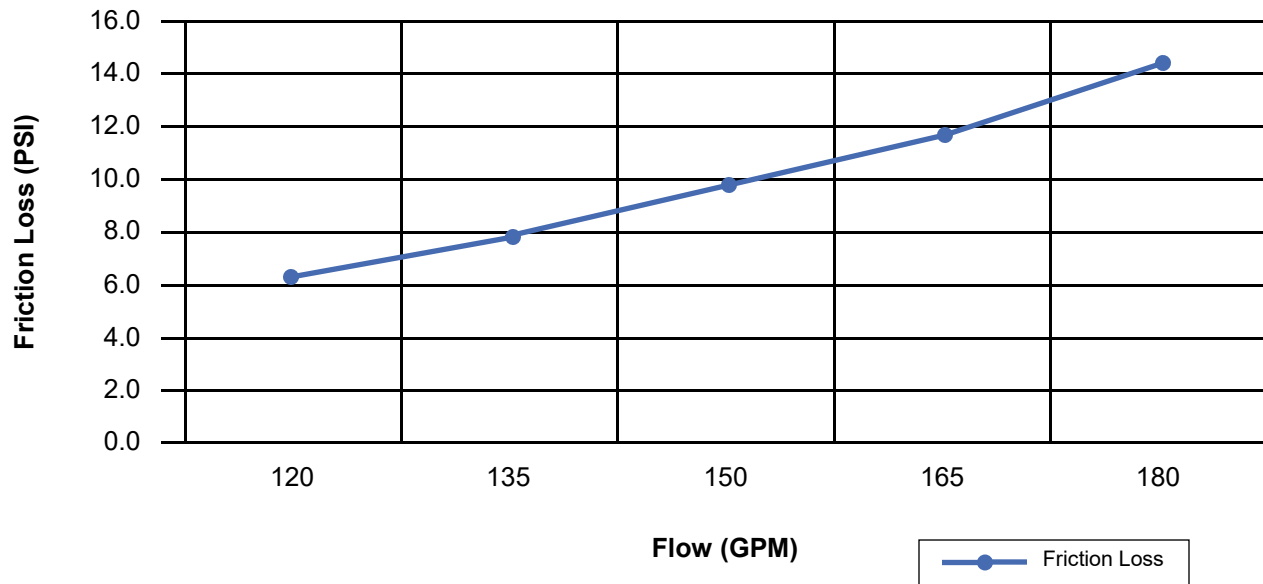

2½" Hose Valve Friction Loss

