

Hydrant Gate Valve - 175 PSI Rated

Used to throttle the flow of a fire hydrant without damaging the hydrant itself.

Features a non-rising stem and crank handle.

Part Number	Size	Configuration
VAL05116C	2½" NST x 2½" NST	Female x Male

Specify Finish:

- Rough Brass
- A Aluminum



Hydrant Gate Valve - 300 PSI Rated


Used to throttle the flow of a fire hydrant without damaging the hydrant itself. May also be used on fire pump test connections and test headers that have male NST outlets.

Features a non-rising stem & hand wheel. U/L listed. Contact us for current approvals.

Part Number	Size	Configuration
VAL078	2½" NST x 2½" NST	Female x Male

Specify Finish:

- Rough Brass
- PC Polished Chrome

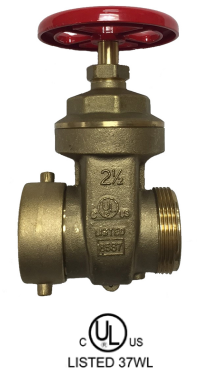

Wedge Disc Gate Valve - 300 PSI Rated

Intended for use on fire pump test connections and test headers, as well as roof hydrants.

Features a non-rising stem & hand wheel. U/L listed. Contact us for current approvals.

Part Number	Size	Configuration
VAL53-25	2½" NPT x 2½" NST	Female x Male
VAL53-3	3" NPT x 2½" NST	Female x Male

Specify Finish:

- RB Rough Brass
- PB Polished Brass
- PC Polished Chrome

