

SUBMITTAL: MODEL TMP™ & TME™ ACCESS PANELS FOR PLASTER WALLS/CEILINGS PAGE 1 OF 2

These access panels feature a metal flange that is recessed 3/4" from the face of the frame for application of plaster. Model TME has additional expanded metal lath wings. A continuous hinge, ensures easy opening of the panel. Door size is order size.

SPECIFICATIONS TMP:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 1.375" wide metal flange that is recessed 3/4" from the face of the frame for application of plaster. Minimum Size 6" x 6", Max Size 36" x 36".

Finish: White powder coat paint.

Lock: Flush screwdriver-operated steel cam standard.

SPECIFICATIONS TME:

Door Panel: 16 gauge steel with concealed continuous hinge mounted on long side of panels.

Frame: 16 gauge steel with 2-3/4" wide Galvanized Expanded Metal Lath that is recessed 3/4" from the face of the frame for plaster application. Minimum Size 6" x 6", Max Size 36" x 36".

Finish: White powder coat paint.

Lock: Flush screwdriver-operated steel cam standard.

Please Note This Product Model # Has Changed.

Please Note - Color Codes and Lock Option Codes have Changed.

STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

____ For sizes not shown on chart. ____" W x ____" H (See sizes above)

____ **TME** (Plaster) ____ **TMW** (Wallboard)

STEP 2: SELECT MATERIAL:

____ Standard 16 gauge steel

____ Optional galvanized steel **TMPG** or **TMEG** - (additional cost)

____ Optional stainless steel construction with 304 finish (additional cost) **TMPs** or **TMEs**

STEP 3: SELECT OPTIONS AT ADDITIONAL COST

- ☐ Double door
- ☐ Louvered vents
- ☐ Plexiglass view window
- ☐ Removable Door (no hinges)
- ☐ Optional color Code: ____ - see catalog or page 2
- ☐ Alternate depth of trim flange: ____
- ☐ (L) Cylinder lock installed
- ☐ (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- ☐ (M2) Mortise cam lock (06431) installed
- ☐ #0646 Brass Retaining Ring for MP (may be required for locks by others).

- ☐ (U3) Mortise slam lock prep
- ☐ (U4) Mortise slam lock (06431) installed
- ☐ (B1) Mortise deadbolt prep
- ☐ (B2) Mortise deadbolt lock (06431) installed
- ☐ (C2) Torx head cam [View Lock Options Online](#)
- ☐ (C3) Spanner head cam
- ☐ (C4) Hex head cam
- ☐ (C5) Knob cam
- ☐ Other 1-1/8" dia. mortise cylinder by request

Note details here:

[SEVERAL SIZES TMP AVAILABLE FOR 1 DAY SHIPPING FROM SELECTED WAREHOUSES](#)



TME With 3" Expanded Metal



TMP with 3/4" Metal Lath Wings

NEW- REVIT OBJECTS FOR BIM—[TMP DOWNLOAD](#)
[TME DOWNLOAD](#)

Order Format Example: TMP-2424LBK

Model	Width	Height	Lock (C Std or Option Code)	Optional Paint
TMP				
TME				
TMPG				
TMPs				





Standard Cam Latch

LATCH AND LOCK OPTIONS

Mortise Lock (M2) (U4) (B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

 ACTIVAR INC. <small>CONSTRUCTION PRODUCTS GROUP</small> TMP and TME ARE TRADEMARKS OF ACTIVAR <small>PLEASE DOWNLOAD MOST CURRENT SUBMITTAL FROM WEBSITE BEFORE ORDERING</small>	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: © Activar Construction Products Group 2016
HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON, MN 55431 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: DALLAS TX, FT MYERS FL, LANCASTER PA, ATLANTA GA, CHICAGO, IL, SEATTLE WA, FARGO ND, OMAHA NE 11/29/2016		

TMP	TME	A	C WALL OPENING DIMENSIONS FITS ± 1/8" OPENING SIZE		SHIPPING WEIGHT APPROX.	LATCH(ES)
QTY	QTY	WIDTH X HEIGHT	WIDTH	HEIGHT		
		12" x 12"	12 1/2"	12 1/2"	7 lbs	1
		16" x 16"	16 1/2"	16 1/2"	10 lbs	1
		16" x 20"	16 1/2"	20 1/2"	12 lbs	2
		18" x 18"	18 1/2"	18 1/2"	12 lbs	3
		24" x 24"	24 1/2"	24 1/2"	19 lbs	4
						TBD
Sizes Not Shown May be Ordered in 1/4" Increments on Blank Line Above For Example 16-1/4", 16-1/2" or 16-3/4" Minimum Size 6" x 6", Max Size 36" x 36"						

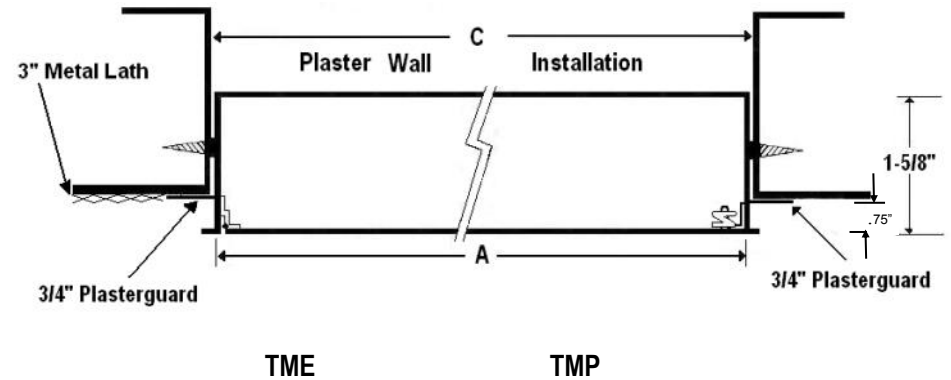

TME Expanded
Metal for Plaster

Optional Colors at Additional Cost - Samples Available			
G-Gray	R-Red	BK-Black/FB Flat	SI - Silver
S-Sand	AB-AMS Beige	SB-SC Flat Beige	B-Bronze